

# Stream Quality Monitoring 2012 Annual Report Little Miami State & National Scenic River

## Contents

Introduction .....	1
Overview .....	2
Stream Quality Monitoring Station Map .....	3
Stream Quality Monitoring Participants.....	4
Monitoring Station Descriptions .....	5
Sampling Results & General Trends .....	7
Total Suspended Solids (TSS) .....	8
Comparisons of Collected Stream Quality Monitoring Data .....	9
Table 1 - Macroinvertebrate Pollution Tolerance.....	9
Table 2 - 2012 Mean CIVs by Reference Station .....	10
Figure 1 - 2012 CIV Ranges by Reference Station .....	10
Figure 2 - 2002-2012 Mean CIVs by Reference Station.....	11
Appendix - 2012 Stream Quality Monitoring Data by Station	

## Introduction

### Ohio Scenic Rivers Program

With more than 60,000 miles of streams, Ohio is a water-rich state. Many of Ohio's streams support thriving plant and animal communities, including Ohio's state designated scenic rivers. Administered by the Ohio Division of Watercraft, the Ohio Scenic River Program oversees 14 state designated scenic river systems, comprising 800 river miles along 26 stream segments. These streams represent some of the best of Ohio's waterways.



### Stream Quality Monitoring Project

Developed in 1983, the Ohio Stream Quality Monitoring (SQM) Project uses volunteers who assist in aquatic macroinvertebrate monitoring to compile biological and water quality data on the state's scenic rivers. The Ohio SQM Project is an excellent, simple, and cost-effective method of assessing a stream's health.

Aquatic macroinvertebrate organisms lack a backbone (invertebrate), are large enough to view with the naked eye (macro), and spend at least a portion of their lives in the water (aquatic). Macroinvertebrates, such as various aquatic insects (e.g. mayfly, stonefly), are good indicators of stream health. When negative impacts to a stream occur, the result may show a decline or absence of certain macroinvertebrate species.

Through consistent monitoring, changes observed in the macroinvertebrate community help the Ohio Scenic Rivers Program in detecting and addressing potential impacts to a stream. The Ohio Scenic Rivers Program compiles volunteer field assessment information into a statewide database. The database serves as a tool to track short- and long-term changes and trends over time.

### SQM Project Relies on Volunteers

Coordinated by the Division of Watercraft's Scenic River Program, the Ohio SQM Project provides opportunities for public participation in scenic river protection efforts. Many local, youth and conservation organizations, individuals, and families are committed to monitoring more than 150 stations along Ohio's scenic rivers.

SQM volunteers collect macroinvertebrate data from selected monitoring stations, also referred to as monitoring sites or reference stations, at least three times during the monitoring season. Volunteers complete field assessment forms that document taxonomy, tolerance, and abundance of collected organisms.

### SQM Annual Report

The information collected by volunteers has become a critical tool for documenting the health of Ohio's state scenic, wild and recreational rivers. This report is a compilation of field data collected during 2012 by volunteers and staff. It also represents a year of dedication and commitment shown to Ohio's special waterways by thousands of SQM volunteers.

## Overview

On April 23, 1969, the Little Miami River earned the distinction of becoming Ohio's first designated State Scenic River. From its headwaters in Clark County, the Little Miami flows southwesterly for more than 100 miles, traversing five counties before arriving at its confluence with the Ohio River. The Little Miami River was also the first Ohio stream to be designated as a National Scenic River.


Noted for breathtaking vistas and scenery, the Little Miami River supports rich and abundant aquatic life. More than 87 species of fish, 36 species of mussels (including five state endangered species) and untold species of breeding birds reside within the river valley. Exceptional water quality in the Little Miami also supports diverse populations of pollution-intolerant macroinvertebrates, such as dobsonfly larvae, water penny beetles and many others.


Public access to the Little Miami Scenic River is readily available through a variety of facilities including Clifton Gorge State Nature Preserve, John Bryan State Park, several Greene County parks, the Little Miami State Park and several scenic river access sites. Additionally, numerous private campgrounds and canoe liveries offer a variety of activities for enjoying the river. Due to its unique combination of spectacular beauty and easy access, the Little Miami Scenic River is a popular venue for hikers, canoeists, fishermen and bicyclists.

The Little Miami River valley is also home to many of Ohio's significant historical and archaeological sites. Fort Ancient, located in Warren County and managed by the Ohio Historical Society, was home to at least two of Ohio's prehistoric mound-building tribes. The Little Miami valley was also home to the Shawnee Indians and the influential chief, Tecumseh. Arrowheads, pottery shards and many other Indian artifacts are commonly found along the river.

The Little Miami flows through several natural areas which highlight the wide diversity of Ohio's ecology. For instance at Clifton Gorge State Nature Preserve, the high dolomite cliffs of the narrow gorge provide an exceptional display of plants commonly seen in climates much farther north. Boreal relicts, such as hemlocks and white cedars, provide an interesting view into Ohio's glacial past. Additionally, more than 340 species of wildflowers are found in the preserve during the spring and summer months.

The Little Miami Scenic River is one of Ohio's exceptional waterways and an ideal place to spend a weekend exploring the natural heritage of our state. For more information about public access and facilities along the river, contact the Southwest Ohio Regional Scenic River Manager at 513-934-0751.

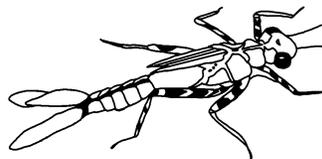

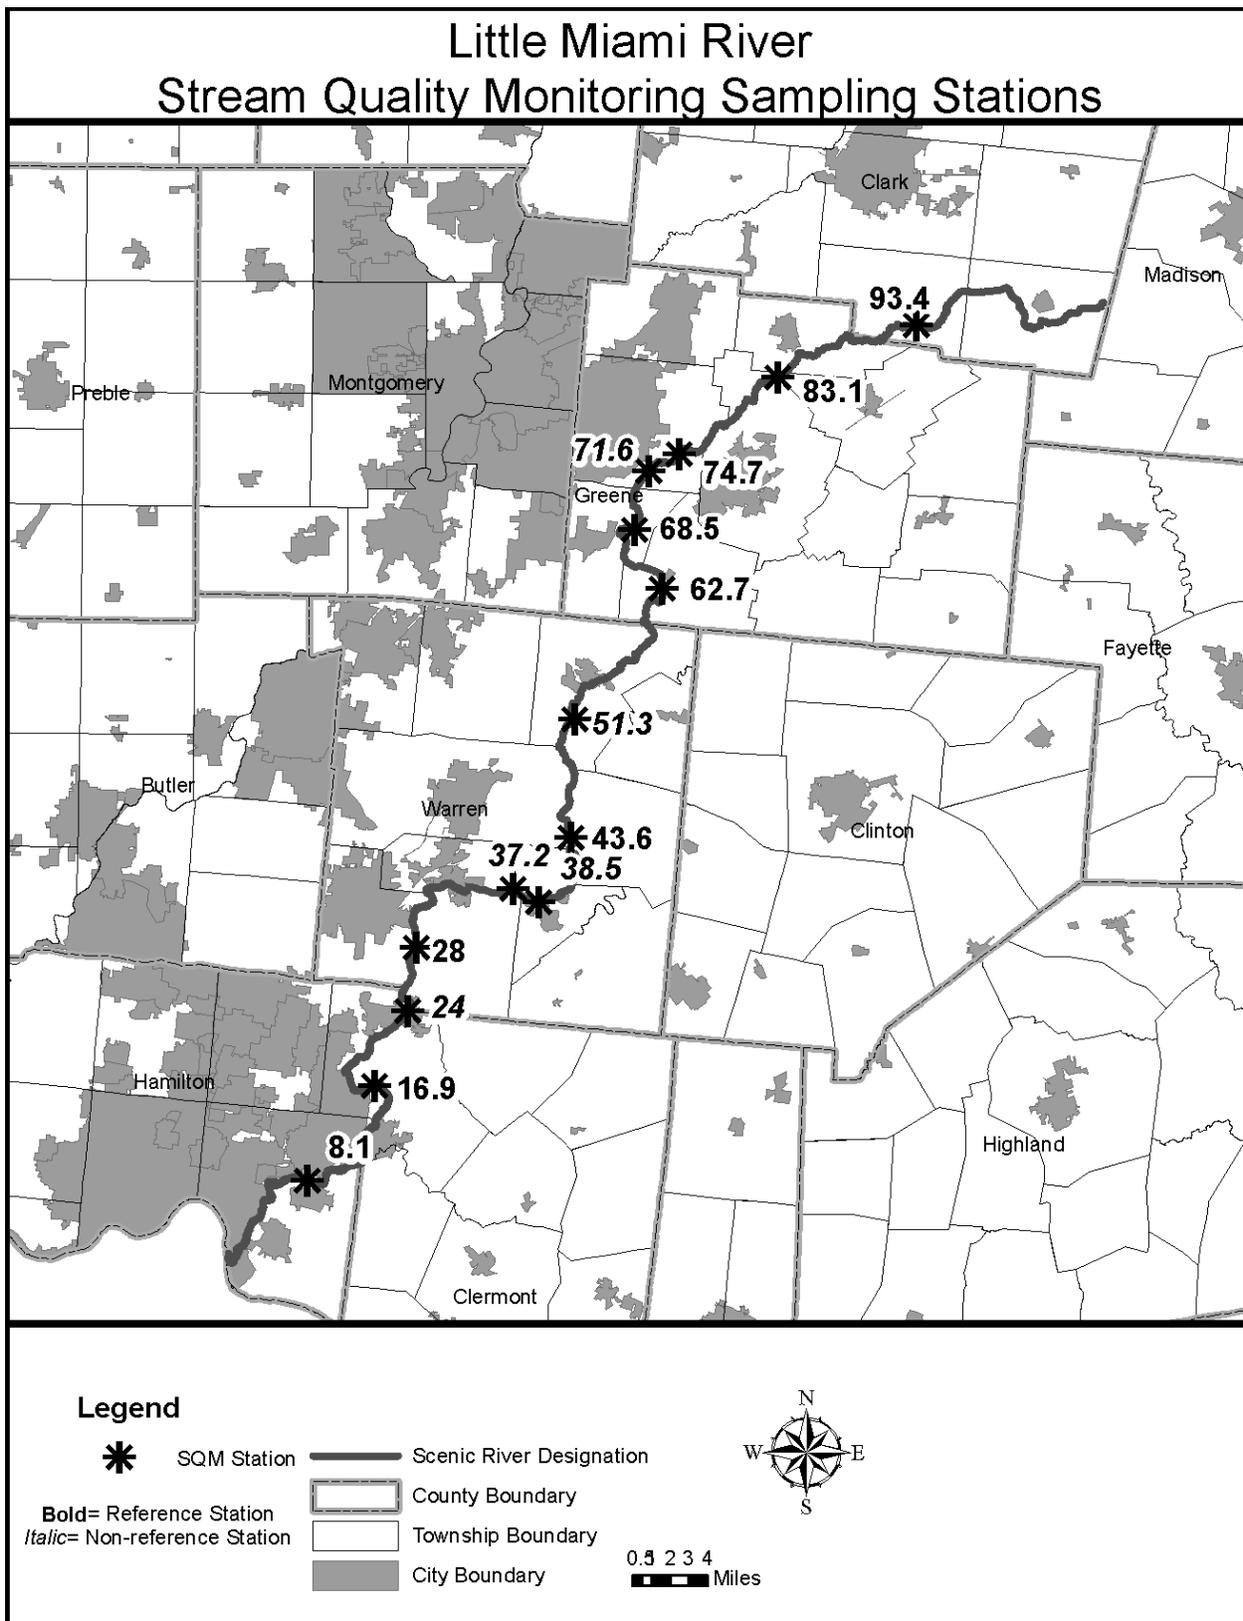

## 2012 Stream Quality Monitoring Participants

Whether their contribution was a one-time event or a recurring adventure in stream exploration, the individuals and organizations listed below played a significant role in protecting the Little Miami River. Their time and dedication to this river and the Ohio SQM Project is greatly appreciated. Special thanks are extended to the Little Miami Scenic River Advisory Council for their continued support and assistance.

**River Mile 8.1 - Bass Island Park Access**

Steve and Gerri Lilly

**River Mile 16.9 - Rock Pit Access**

Steve and Gerri Lilly

**River Mile 24.0 – Nesbit Park Access (*non- reference site*)**

Bryan Jones: Sycamore Junior High School

**River Mile 28.0 - Carl Rahe Memorial Access**

Friends of Simpson Creek

Diana Halligan

Josh Rogers and Scenic Rivers Staff

**River Mile 37.2 - Hall's Creek Access (*non-reference station*)**

Volunteers Needed

**River Mile 38.5 – Confluence of Todd's Fork (*non-reference station*)**

Volunteers Needed

**River Mile 43.6 - Fort Ancient Access**

Steve Long and scenic rivers staff

**River Mile 51.3 - Caesar Creek Access**

Bob & Pat Foreman

**River Mile 62.7 Constitution Park**

Volunteers Needed

**River Mile 68.5 - Washington Mills Access**

– Bill Schieman

**River Mile 71.6 - The Narrows Reserve (*non-reference station*)**

Christine Evans St Albert's the Great

**River Mile 74.7 - Glen Thompson Reserve**

Bill Schieman

Christine Evans St Albert's the Great

**River Mile 83.1 - Jacoby Road Access**

Volunteers Needed

**River Mile 93.4 - Garlough Road Access**

Volunteer needed

The continued success of the Stream Quality Monitoring Project is dependent upon the commitment and dedication of these (and other) volunteers and participants. If you would like to participate in Ohio's volunteer Stream Quality Monitoring Project, please contact the Southwest Ohio Stream Quality Monitoring Coordinator 513-934-0751.

## Station Descriptions

Public access to the Little Miami River is widely available. As a result, many stream quality monitoring stations are located on public property and present little difficulty for volunteers to access and regularly monitor. The following are brief summaries of selected stream quality monitoring sites along the Little Miami River.

### **River Mile 8.1 - Bass Island Park Access**

Bass Island is managed and maintained by the Hamilton County Park District. The area is heavily used and easily accessed by fishermen, hikers and canoeists. It is an excellent site to access the lower stretch of the Little Miami. The riffle is very deep at this station and is comprised of mostly cobbles and gravel, providing excellent habitat for dobsonfly larvae and stonefly nymphs.

### **River Mile 16.9 - Rock Pit Access**

An excellent sampling station on the Little Miami, the riffle area here is approximately 100 feet wide. A high diversity of macroinvertebrates inhabits this site with damselfly nymphs being quite common.

### **River Mile 28.0 - Carl Rahe Memorial Access (Glenn Island)**

This monitoring station is easily accessible with ample parking available. The Carl Rahe Memorial Access, once called Glen Island, is one of the more popular fishing sites along the Little Miami in Warren County. Large cobbles, gravel and boulders make up the river bottom with a wide variety of macroinvertebrates inhabiting this riffle. Many pollution-intolerant species are found here, including a large number of caddis fly larvae.

### **River Mile 43.6 - Fort Ancient Access**

Famous for the nearby Indian burial mound site administered by the Ohio Historical Society, the Fort Ancient station provides access to a variety of activities along the Little Miami River. Used heavily by fishermen and canoeists, this access provides plenty of parking and well-established trails to the sampling area. The riffle area is composed mainly of gravel and cobbles, which provide excellent habitat for a wide variety of macroinvertebrates.

### **River Mile 51.3 - Caesar Creek Access**

Due in part to the shallowness of this riffle area, water penny beetle larvae are found abundantly at this site. The site is found just upstream from one of Warren County covered bridges.

### **River Mile 62.7 - Constitution Park**

This riffle is shallow and mostly sand, gravel and some cobblestones. Numerous water penny larvae can be found at this site along with a large variety of other pollution-intolerant species, contributing to high CIVs..

### **River Mile 68.5 - Washington Mills Access**

This sampling station is located adjacent to Stewart Road in the small town of Bellbrook. The riffle area is located under and immediately downstream from the bridge. Large gravel and cobbles comprise the majority of the river bottom and macroinvertebrate habitat at this site is generally good.

### **River Mile 74.7 - Glen Thompson Reserve**

Glen Thompson Reserve is a small park area owned by the Division of Natural Areas and Preserves; it is located immediately adjacent to State Route 35 and managed by the Greene County Park District. The riffle area, located about 200 yards upstream from the State Route 35 bridge crossing is composed primarily of gravel and cobbles and is considerably deep. This composition results in excellent habitat for dobsonfly larvae (hellgrammites) which are known to prefer deep, swift-moving riffles.

**River Mile 83.1 - Jacoby Road Access**

Located northwest of the City of Xenia, the Jacoby Road Access area is both easily accessible and an excellent site to sample. It is also a popular canoe access. Adequate parking is available for school groups wishing to utilize the river for the study of the macroinvertebrates and water quality relationship. The heavily forested river corridor in this area, when combined with a riverbed comprised of sand, gravel, cobble and boulders results in exceptional aquatic habitat. Within the 40-foot-wide riffle area, nearly all pollution-intolerant organisms may be collected at this sampling station.

**River Mile 93.4 - Garlough Road Access**

The northern most sampling station on the Little Miami, this area is located on Garlough Road in southern Clark County. Access is difficult due to thick brush and undergrowth and parking is restricted to the bridge area. Caution must be exercised when sampling this station. The riffle area is quite narrow and the riverbed is comprised mostly of sand and gravel. At times in the late summer and fall, the water is so clear that it is difficult to determine the depth of the water.

## Sampling Results and General Trends

The 2012 field-monitoring season saw one of the warmest and driest on record (National Oceanic and Atmospheric Administration). Due to these weather conditions the volunteers had little difficulty accessing the ten designated reference sites during much of the year. This was a change from the 2011 season where record rainfall in the spring made it difficult for many volunteers to monitor their sites. However, during the month of May, rainfall amounts made it difficult for data to be collected at reference sites. Additionally, staffing changes during the 2012 sampling season meant that very few reference sites were monitored. The SQM Project requires a minimum of 3 readings to calculate a Cumulative Index Value (CIV), with a minimum of 30 days between each sample. The weather, coupled with staffing changes, resulted in a poor year for data collection and CIV calculation in the river.

With continued development along the Little Miami River, there comes immense pressure on the river ecosystem. Deforesting of stream banks, runoff, alteration of the riverbed, changes to riffle structures and the increase of impermeable surfaces are all examples of the impacts of development. Despite development pressures, sampling results on the Little Miami River during the 2012 season showed an increase of the average CIV at two stations with one station showing a decline. The average CIV of the three stations sampled for 2012 was 29.3 while the average of the same stations for 2011 was 27.6. The Little Miami River's average taxonomic diversity for these stations per assessment was 13 macroinvertebrate orders (e.g. stonefly, damselfly, mayfly, etc.) which is an increase of one taxonomic order.

Attention should be paid to the increasing percentage of impermeable surfaces within this watershed. Impermeable surfaces create an increase of non-point source pollution. This can also affect soil and tree root systems that would normally absorb and filter water, forcing the unfiltered water and sediments to enter directly into the river system. Furthermore, new developments have minimized the existing forest corridor along the river. The forest corridor plays many important roles in the watershed community. It acts as a large buffer system that filters incoming non-point source pollution. The root system of the trees prevents erosion by holding the soil in place. The shade cast by the forest canopy sustains a generally constant water temperature. Also the forest corridor provides organic matter as a food source for many organisms in the river system.

Volunteer and ODNR staff data are used for the Ohio Stream Quality Monitoring Project as a water quality-screening method. The data helps in detecting significant changes in stream quality based on CIV data from sites that have been monitored for many years over time by staff and trained volunteers. In the event that significant CIV declines are noticed for a particular site, potential problems that may be causing stream degradation can be further investigated and addressed.

The staff of the Ohio Scenic Rivers Program appreciates the assistance we received from our dedicated volunteer monitors. Working together has produced significant results but additional volunteers are needed to monitor at all reference sites to ensure accurate and thorough data. For more information, please contact the Southwest Ohio Scenic River SQM Coordinator at 513-934-0751.

## Total Suspended Solids (TSS)

In 1999, the Scenic River Program added Total Suspended Solids (TSS) monitoring to the Stream Quality Monitoring (SQM) Project. The purpose of this addition is to estimate the amount of soil sediments impacting a stream by estimating the turbidity of the water. These sediments are attributed to problems originating upstream of the sampling site. The equipment is calibrated to predict Total Suspended Solids (TSS) at 90% accuracy. The measurements are accurate enough to determine the changes in sediment rates in a stream at a given location and time.

Variables such as amount of precipitation, slope and gradient of the river system, soil type, time of year data is collected, amount of development, amount of riparian corridor, velocity of the river flow, and the amount of waste water effluent have an effect on the TSS value.

Precipitation amount is important because of the increased potential for sediments to be carried into the river during a rain event. The TSS value may appear higher than normal if precipitation amounts are not taken into account. Since large rain events usually happen in the spring and early summer, the time of year the samples are taken could affect the TSS score. The gradient (or slope) of the stream is important as well. Sediments do not settle out as easily in high gradient streams because the velocity of the water washes it downstream. In low gradient streams, sediment has a chance to settle out, resulting in a lower TSS value. Soil types impact TSS values because some soil types erode faster than others. A better understanding of the types of soils within the watershed may give way to a better understanding of the baseline TSS values for a stream.

Development in an area can cause changes in the TSS score. Areas cleared for new buildings are often not covered, causing an acute rise in the amount of suspended solids in nearby streams. Impermeable surfaces can also cause chronic elevation of TSS values because there is no buffer to absorb or trap runoff. Wastewater treatment plant effluent would only affect TSS scores in low flow situations, and only if the plant employs only primary or secondary treatment.

The actual process of taking a sample is simple. Using a clear Lucite sediment stick developed by the Lake Soil and Water Conservation District, a water sample is collected from the stream. Keeping the sample materials suspended, water is then poured out of the tube until the 0.4-inch target dot is visible on the tube bottom. A reading of the water column height is taken from the markings on the stick to the nearest  $\frac{1}{4}$  inch. A conversion table is then used to convert the sediment stick reading to total suspended solid measurement in the form of an estimate of the weight of solids suspended in the water column (mg/l).

The TSS measurement can further be used to estimate water quality through the use of the following scale:

- TSS <10 mg/l = excellent water quality
- TSS 10-28 mg/l = normal water quality
- TSS 29-133 mg/l = impaired water quality
- TSS >133 mg/l = severely impacted water quality

**2012 TSS Results:** A total of 22 TSS readings were taken in the Little Miami River. The Little Miami River had a median value of 10 mg/L of TSS, corresponding to the normal range. The data set ranged from 5 to 24 mg/L of total suspended solids.

## Comparisons of Collected Stream Quality Monitoring Data

Monitoring of the same reference station is performed a minimum of three times per year consistently year after year. An assessment of the diversity and tolerance levels of taxonomy collected generates the Cumulative Index Value (CIV) for the site on a given date.

Field assessment results are used as basic indicators of long-term changes in a stream's macroinvertebrate community and help the Scenic Rivers staff identify pronounced stream quality problems.

Table 1 identifies the 20 macroinvertebrates assessed and their general tolerance to pollutants. Pollution-intolerant organisms, such as those listed in Group I, require unpolluted, high quality water in order to survive. Pollution-tolerant organisms, such as those listed in Group III, are extremely tolerant of deteriorated water conditions.

**Table 1. Macroinvertebrate Pollution Tolerance**

<b>Group I Taxa Pollution Intolerant</b>	<b>Group II Taxa Moderately Tolerant</b>	<b>Group III Taxa Pollution Tolerant</b>
Water Penny Beetle Larvae (WP) Mayfly Nymphs (MF) Stonefly Nymphs (ST) Dobsonfly Larvae (DO) Caddis fly Larvae (CD) Riffle Beetle Adult (RI) Other Snails (OS)	Damselfly Nymphs (DA) Dragonfly Nymphs (DR) Crane Fly Larvae (CR) Beetle Larvae (BL) Crayfish (CF) Scuds (SC) Clams (CL) Aquatic Sowbugs (SW)	Black Fly Larvae (BF) Aquatic Worms (AW) Midge Larvae (MI) Pouch Snails (PS) Leeches (LE)

Table 2 represents the mean Cumulative Index Values (CIVs) for each Stream Quality Monitoring reference station sampled on the river during 2012. In addition, the table uses symbols (◆) to indicate those macroinvertebrates found to be present at least once during the year at the respective reference station. Each macroinvertebrate is identified by a 2-letter code given in Table 1. CIVs of 23 or greater indicate *Excellent* stream quality; CIVs of 17-22 indicate *Good* stream quality; CIVs ranging from 11-16 suggest *Fair* stream quality; and CIVs of 10 or less reflect *Poor* stream quality. Situated beside the CIV are the symbols + (improved), = (equal), or – (declined) indicating the relationship to the previous years CIV.

For the full range of CIV attained at all sites monitored during the year, including non-reference stations, please see the *Appendix*.


**Table 2. Little Miami River 2012 Mean CIVs by Reference Station**

Station	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	S L	S W	B F	A W	M I	P S	L E	CIV
8.1	◆	◆	◆		◆	◆	◆	◆			◆			◆	◆	◆	◆			◆	*
16.9	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆			◆		◆		◆	◆	26+
28	◆		◆		◆	◆	◆	◆	◆				◆	◆	◆		◆	◆		◆	*
43.6	◆	◆	◆		◆	◆	◆	◆	◆		◆			◆	◆		◆			◆	*
51.3		◆	◆	◆	◆		◆							◆			◆				*
62.7																					*
68.5	◆	◆	◆		◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆	◆	31+
74.7	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆		◆			◆	◆	◆	◆	31+
83.1																					*
93.4																					*


\* Not enough samples were taken to determine an average CIV for the year.

Figure 1 represents the maximum and minimum CIV ranges recorded during the year for each reference station. Figure 2 represents the mean CIVs at each reference station over many years.

**Figure 1. Little Miami River 2012 CIV Maximum and Minimum Ranges**

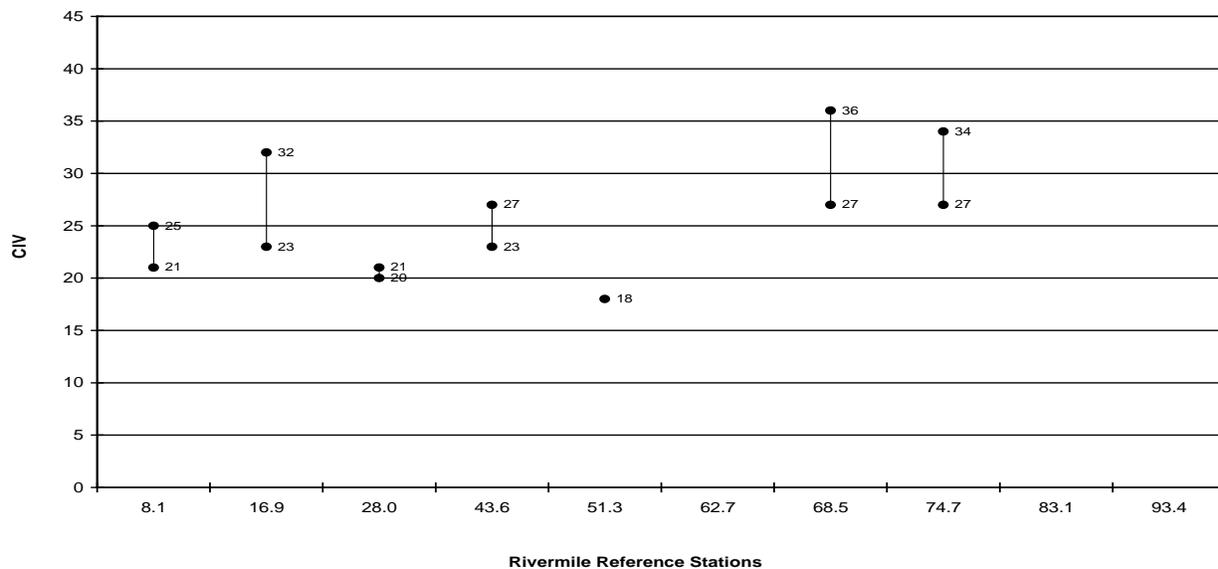

**Figure 2 Little Miami River 2003- 2012 Mean CIVs**

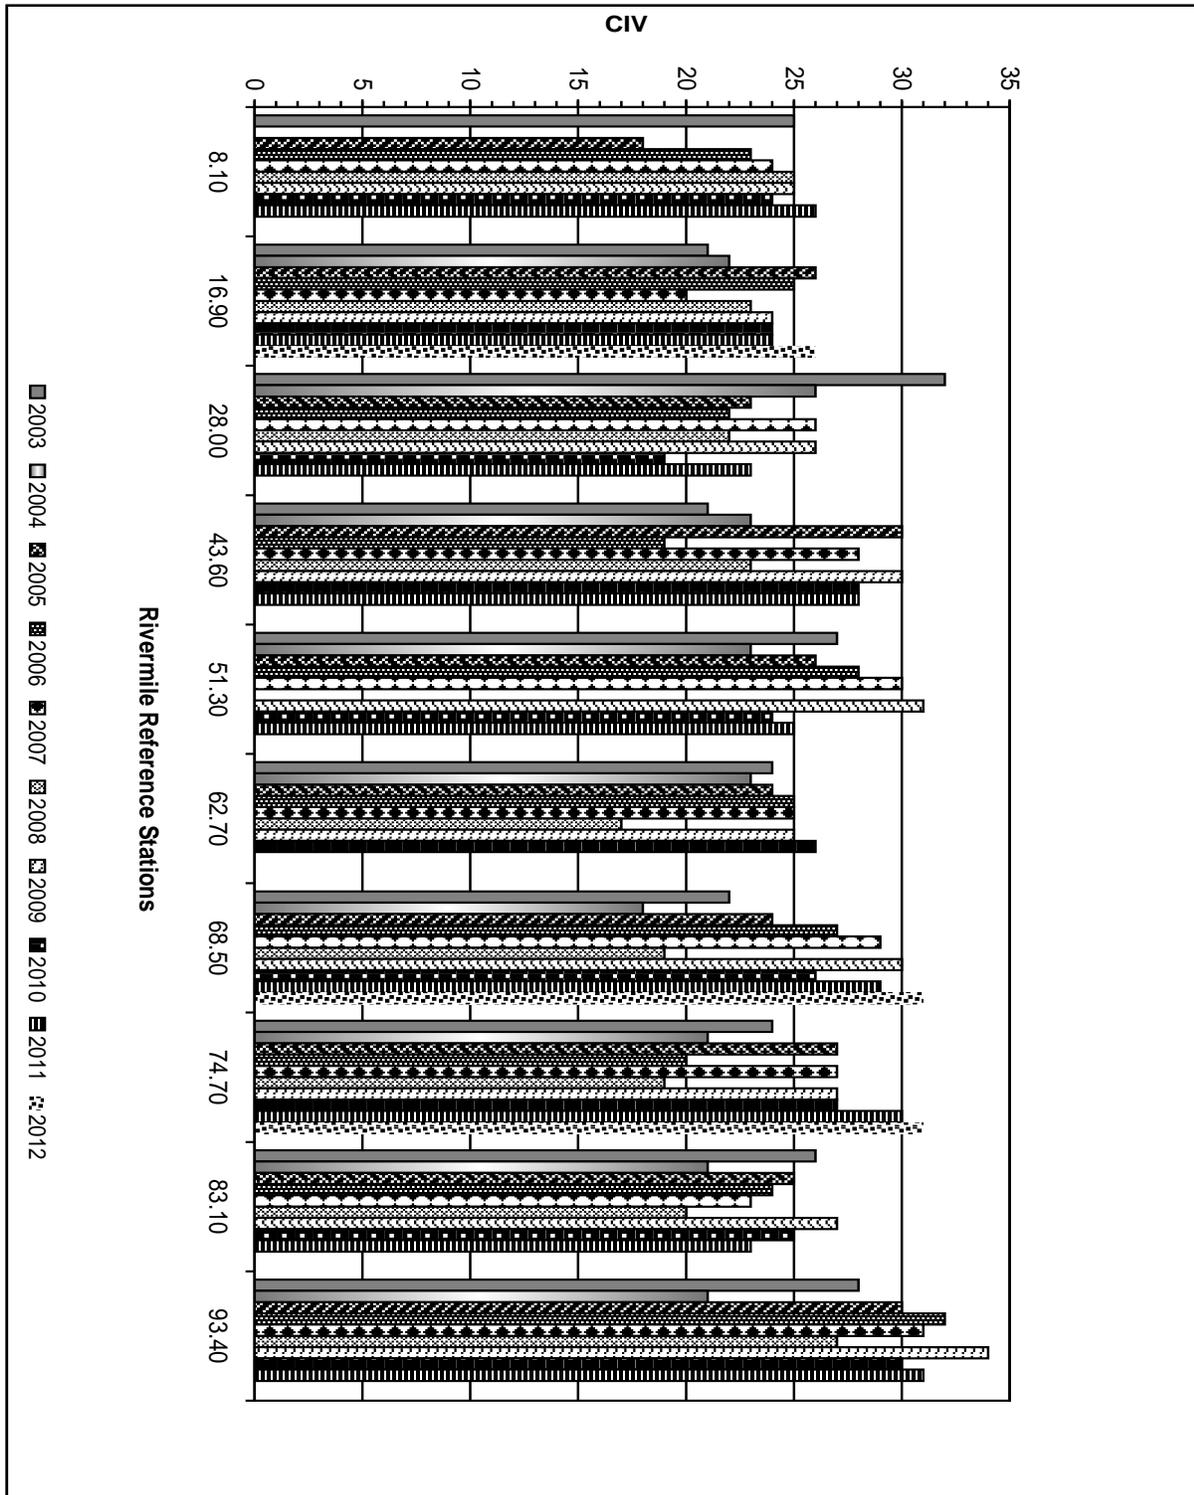

## Appendix

### 2012 Data by Monitoring Station

Little Miami River																						
RM	DATE	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	C L	S W	B F	A W	M I	P S	L E	CIV
8.1	5/31/12		A	A		C	C	A				A				A	A	A				21
8.1	10/27/12	A	B	A		C	A		B			A			A	A		A			A	25
16.9	5/31/12	A	A			C	B	C	A			B			A			B			B	23
16.9	9/13/12	B	C	B	B	C	C	C	B	B			B		B			C		B	B	32
16.9	10/27/12	A	B			C	A	B	B			A			B			A			A	23
28.0	6/23/12	A		A		B	B	B		A				A	A			C	B			20
28.0	10/6/12	B				C	B	C	A					A	C			C	A		A	21
43.6	10/18/12	A	A	B		A	A	A	A	A					A	A		A				27
43.6	11/18/12	A	A	B		A	A	A	A	A					B	A		A				27
43.6	11/17/12	A	B			C	A	B	B			A			B			A			B	23
51.3	7/29/12		A	A	A	A		B							A			A				18
68.5	6/9/12	A	B			C	B	B	A	A	A	A	A		B			A	B	A	A	31
68.5	7/6/12	A	B			C	A	B	A		A	A	A		B			A		A		27
68.5	9/14/12	A	B	A		C	A	B	A	A	A	B	A		B	A		A	B	A	A	36
74.7	6/9/12	A	B	B		C	B	B	A		A	A	A		B			A	B	A		31
74.7	7/4/12	A	B			C	B	B	B	A		A	A		B			A	B			27
74.7	9/14/12	A	B	A	A	C	B	B	A	A		B	A		C			A	A		A	34