



Kokosing State Scenic River



Ohio
Stream Quality Monitoring
2008 Annual Report



Kokosing State Scenic River 2008 Stream Quality Monitoring Annual Report

Contents

Introduction	2
Overview	3
Stream Quality Monitoring Station Map	4
Stream Quality Monitoring Participants.....	5
Station Descriptions	7
Sampling Results and General Trends	9
Total Suspended Solids (TSS).....	10
Comparisons of Collected Stream Quality Monitoring Data.....	11
Table 1 - Macroinvertebrate Pollution Tolerance	11
Tables 2, 3 - 2008 Mean CIV by Reference Station.....	12
Figures 1.1, 2.1 - 2008 CIV Ranges by Reference Station	12,14
Figures 1.2, 2.2 - 1999-2008 Mean CIV by Reference Station	13,14
Tables 4.1, 4.2 - Qualitative Habitat Evaluation Index (QHEI)	15
Appendix - 2008 Stream Quality Monitoring Data by Station	16

Introduction

Ohio Scenic Rivers Program

With more than 60,000 miles of streams, Ohio is a water-rich state. Many of Ohio's streams support thriving plant and animal communities, including Ohio's state designated scenic rivers.

Administered by the Ohio Division of Natural Areas and Preserves, the Ohio Scenic Rivers Program oversees 14 state designated scenic river systems, comprising 800 river miles along 26 stream segments. These streams represent some of the best of Ohio's waterways.



Stream Quality Monitoring Project

Developed in 1983, the Ohio Stream Quality Monitoring (SQM) Project uses volunteers in aquatic macroinvertebrate monitoring to compile biological and water quality data on the state's scenic rivers. The Ohio SQM Project is an excellent, simple and cost-effective method of assessing a stream's health.

Aquatic macroinvertebrates are organisms that lack a backbone (invertebrate), are large enough in size to view with the naked eye (macro), and spend at least a portion of their lives in the water (aquatic). Macroinvertebrates, such as various aquatic insects (e.g. mayfly, stonefly), are good indicators of stream health. When negative impacts to a stream occur, the result may show a decline or absence of certain macroinvertebrate species. Through consistent monitoring, changes observed in the macroinvertebrate community help the Ohio Scenic Rivers Program in detecting and addressing potential impacts to a stream.

The Ohio Scenic Rivers Program compiles volunteer field assessment information into a statewide database. The database serves as a tool to track short- and long-term changes and trends over time.

SQM Project Relies on Volunteers

Coordinated by the Division of Natural Areas and Preserves, the Ohio SQM Project provides opportunities for public participation in scenic river protection efforts. Many local, youth and conservation organizations, individuals and families are committed to monitoring more than 150 stations along Ohio's scenic rivers.

SQM volunteers collect macroinvertebrate data from selected monitoring stations, also referred to as monitoring sites or reference stations, three times during the monitoring season. Volunteers complete field assessment forms which document taxonomy, tolerance and abundance of collected organisms.

SQM Annual Report

The information collected by volunteers has become a critical tool for the documenting of the health of Ohio's state scenic, wild and recreational rivers. This report is a compilation of field data collected during 2008 by volunteers and staff. It also represents a year of dedication and commitment shown to Ohio's special waterways by thousands of SQM volunteers.

Kokosing State Scenic River

Overview

The Kokosing River watershed is situated between two urban centers, Mansfield and Columbus, in the northeast central Ohio rural countryside. Most of the watershed lies within Knox County, which was on the outer edge of an area covered by continental glaciers. Two main glacial events left their mark on the landscape. The first was the Illinoian glacier that moved across the watershed and covered most of the eastern part of Knox County. The ice flowed around and between the hills leaving glacial deposits of varying thickness. The second glacial event only covered the western part of Knox County. It also left thick deposits of gravel, sand and silt. These events molded the present landscape.

Forty-eight miles of the Kokosing River system were designated as Ohio's 11th scenic river in 1997. The main stem Kokosing is designated from the confluence with the Mohican and Walhonding rivers, 41.1 miles upstream to the Knox/Morrow County line. The North Branch Kokosing is designated from the confluence with the main stem Kokosing, upstream 6.5 miles, to the confluence with the East Branch Kokosing, just north of Fredericktown. More than 70 species of fish, five species of freshwater mussels, and 24 species of amphibians, including the state endangered hellbender, inhabit the Kokosing River system. Nearly 90 species of breeding birds may also be found in the forested lands along the riverbanks. These forested banks are a vital part of the Kokosing's exceptional habitat, water quality and scenery.


The Kokosing River name has an interesting history. The name "Kokosing" in the Delaware Indian language is said to mean "river of many Delaware villages." Other sources say that the word "Kokosing" was used by the Algonquin Indians and meant "river of little owls." In addition, many early historians referred to the river as "Owl Creek." Use of this name prior to 1866 is corroborated by the names used for the Owl Creek Bank of Mt. Vernon, Owl Creek Baptist Church and the Owl Creek Bookstore among others. There are also records of the name "Vernon River" being promoted by Bishop Philander Chase, founder of Kenyon College.

Over two centuries have passed since the first pioneers settled the Kokosing watershed. Remarkably, the population has not quite doubled since 1840. This slow growth rate combined with fairly stable land use patterns has benefited the river system. Since the initial period of change, the river system has adapted fairly well and has been able to maintain a higher quality than many other Ohio streams. This high quality status may be attributed largely to the diverse stream substrate left by the glaciers and to the presence of a healthy wooded corridor maintained by landowners over the years.

The Kokosing and North Branch Kokosing are popular streams for canoeing, fishing, bird watching and other outdoor activities. Additional information about public access facilities on the Kokosing is available by contacting the Division of Natural Areas and Preserves at 614-265-6453 or visiting www.ohiodnr.com/dnap.




Kokosing River Stream Quality Monitoring Sampling Stations

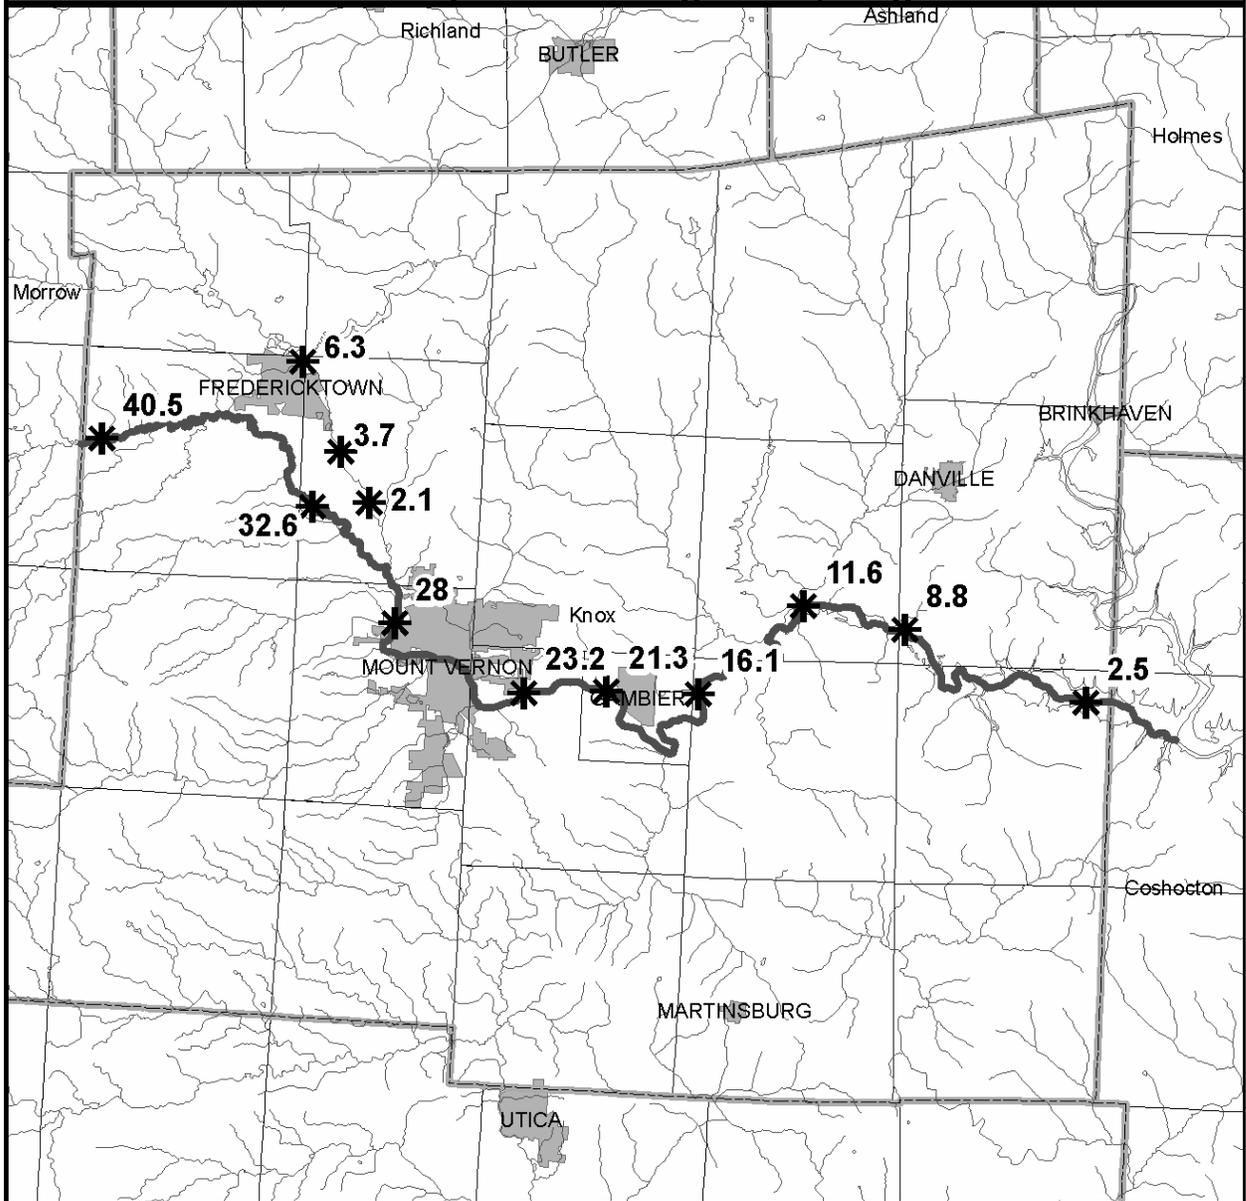

Legend

- SQM Station
- Scenic River Designation
- Streams
- Bold**= Reference Station
- Italic*= Non-reference Station
- County Boundary
- Township Boundary
- City Boundary



2008 Stream Quality Monitoring Participants

Whether their contribution was a one-time event or a recurring adventure in stream exploration, the individuals and organizations listed below played a significant role in the preservation of the Kokosing River. Their time and dedication to this river and the Ohio SQM Project are greatly appreciated. Special thanks are also extended to the Knox Soil and Water Conservation District, Kenyon College Brown Family Environmental Center, private landowners and the Kokosing Scenic River Advisory Council for their continued support and assistance. These reference stations are also closely monitored by Division of Natural Areas and Preserves staff.

Kokosing River

River Mile 2.5 - Riley Chapel Road Bridge

Doreen McBee
Keck Family
Carolyn and Rich Hagopian

River Mile 8.8 - Bridge Street

Paul Stewart

River Mile 11.6 - Howard Riffle

Ted Lacksonen

River Mile 16.1 - Zion Road Bridge

Marcia Morgan and Nancy Badet
Ted Lacksonen

River Mile 21.3 - Village of Gambier

Joan and Bill Heiser
Mihalick Family

River Mile 23.2 - Lower Gambier Road

Ted Lacksonen

River Mile 28.0 - Mt. Vernon Riverside Park

Shawn Blohm

River Mile 32.6 and 32.7 - Beckley Road Bridge

Bob Kyle and Bob Bostard

River Mile 40.5 - Lucerne Road Bridge

Lauren and Al Blyth
Ben Warner

Kokosing River - North Branch

River Mile 2.1 - Beckley Road Bridge

Phyllis and Dave Randall
Karen Chernesky

River Mile 3.7 - Hyatt Road Bridge

Sharon Tindow

River Mile 6.3 - Fredericktown Community Park

Bob Bostard and Bob Kyle

The continued success of the Ohio SQM Project is dependent upon the commitment and dedication of these (and past) volunteers. We would like to recognize volunteers *Robert Kyle, Bob Bostard, Joan and Bill Heiser, Ted Lacksonen, Paul Stewart, Lauren Blyth, Sharon Tindow, Carolyn and Rich Hagopian, Marcia Morgan and Nancy Badet* for monitoring at least three times during the season. If you are interested in becoming a volunteer, please contact the Central Ohio SQM Coordinator at 614-265-6422 or the Division of Natural Areas and Preserves at 614-265-6453.

Station Descriptions

The Kokosing and North Branch Kokosing Rivers are both in largely agricultural watersheds. Most land adjacent to the rivers is privately owned and there are few public access sites. Whenever possible, sampling stations are located in or adjacent to areas where public access is permitted. The following are brief descriptions of selected SQM stations on the Kokosing Scenic River within Knox County.

Kokosing River

River Mile 2.5 - Riley Chapel Road, Butler Twp.

Located downstream from Riley Chapel Road Bridge, this site is the furthest downstream reference station on the Kokosing River. Unlike much of the river, this section lacks a riparian buffer and erosion along the stream banks is apparent. Access to the riffle can be difficult during periods of moderately high water and impossible during periods of high water. The current is usually swift; sampling at this location is best conducted with at least two people.

River Mile 8.8 - Bridge Street, Millwood

Located just upstream from Bridge Street in Millwood, this site is accessed on the south side of the bridge. The riffle is wide and a number of different habitats may be sampled with varying depth, flow and substrate composition. However, the current may be very swift in some areas so caution should be taken.

River Mile 11.6 - Pipesville Road, Howard

Upon reaching the site, 200 yards upstream from Pipesville Road, two riffles divided by a gravel bar will be apparent. Monitoring is conducted at the riffle left of the gravel bar as you approach from downstream. Access is via private property with landowner consent.

River Mile 16.10 - Zion Road, Harrison Twp.

Located immediately upstream from the Zion Road Bridge, this site is accessible from the eastern side of the bridge, where a path leads to the river. This site has a steep gradient so the water current is quite swift.

River Mile 21.3 - Gambier

Access to this site is along the Kokosing Gap Trail, 0.3 miles upstream from Laymon Road Bridge, which runs adjacent to the river. Plenty of parking is available at the gravel lot located near the Brown Family Environmental Center.

River Mile 23.2 - Lower Gambier Road, Pleasant Twp.

This riffle is located immediately upstream of Pine Bridge on the Kokosing Gap Trail and continues underneath the bridge. The site is accessed along the Gap Trail or Lower Gambier Rd.

River Mile 28.0 - Riverside Park, Mt. Vernon

This site is constantly changing due to the Army Corps of Engineers dike management. The availability of public access and ample parking space for several vehicles makes this an ideal site for large groups interested in monitoring.

River Mile 32.6 and 32.7 - Beckley Road, Morris Twp. (*new site*)

Upstream from the Beckley Road Bridge, this riffle is located on private property and permission from the landowner is required. A new site (river mile 32.7) was acquired in 2003 to replace a former site (river mile 32.6) just downstream from it. The stream channel was significantly altered at the former site due to bridge construction in the summer of 2003. In mid-summer of the 2005 season, the bridge construction was finished and the former site (river mile 32.6) was restored.

River Mile 40.5 - Lucerne Road, Wayne Twp.

Located upstream from the Lucerne Road Bridge, this site is located on private property with limited space for one vehicle to park. This site makes up the smallest riffle area (approximately 15' x 3') monitored on the Kokosing River. Although small in size, this site consistently scores in the excellent range.

Kokosing River - North Branch

River Mile 2.1 - Beckley Road, Morris Twp.

Located upstream from the Beckley Road Bridge, this site is on private property and permission from the landowner is necessary. The mouth of this riffle terminates just before a bend in the river and the current can be quite swift at times.

River Mile 3.7 - Hyatt Road, Morris Twp.

This site is located 100 yards downstream from the Hyatt Road Bridge. Access is available on the east side of the river along the bridge right-of-way.

River Mile 6.3 - Fredericktown Community Park, Village of Fredericktown

Located just downstream from the confluence with the East Branch Kokosing River, this public site is excellent for large groups and has ample parking. The river is accessed directly from the park.



Sampling Results and General Trends

Weather conditions for the 2008 season were favorable for field monitoring in the summer and fall months. However, April and May experienced above normal rainfall and prohibited volunteers from accessing some the riffles until after June 30, the typical deadline for spring monitoring. Central Ohio was subjected to a year of slightly above-normal levels of precipitation, as data from the National Oceanic and Atmospheric Administration (NOAA) indicates. We require three readings to calculate a Cumulative Index Value (CIV). All sites were monitored at least three times for the 2008 monitoring season.

Volunteers and staff on the Kokosing River conducted 33 assessments in 2008. The main stem Kokosing River recorded an average CIV of 24.21, corresponding to the excellent range for stream quality. The 2008 CIV average is up from the average score of 19.17 in 2007. The average of taxonomic diversity per assessment is slightly down from 2007. Looking at the Kokosing as a whole, in the past ten years since designation, the river continues to show improvement or stabilization at the majority of sites. We will continue to monitor sites that continue to show degradation closely and work with the community on how we can continue to improve the quality of their river. The average taxonomic diversity per assessment was 10 macroinvertebrate orders (e.g. stonefly, damselfly, mayfly, etc).

Volunteers and staff on the North Branch of the Kokosing River conducted 13 assessments in 2008. The North Branch recorded an average CIV of 25.85, meeting the excellent range of stream quality. This is down slightly from the average of 26.42 in 2007. The average taxonomic diversity per assessment was 11 macroinvertebrate orders; this is slightly up from the average in the 2007 season. Although there was a slight decrease in the average CIVs in 2008, we are confident that in the following years we will see the scores recover with the upgrade of the Fredericktown sewage treatment facility, an increase in no till farming practices and improved public conservation awareness. In it's entirety, the North Brach is showing constant improvement since the designation in 1997.

Volunteer and staff data is used for the Ohio SQM Project as a water quality-screening method. The data helps in detecting significant changes in stream quality based on CIV data from sites that have been monitored for many years over time by staff and trained volunteers. In the event that significant CIV declines are noticed for a particular site, potential problems that may be causing stream degradation can be further investigated and addressed.

The staff of the Ohio Scenic Rivers Program appreciates the assistance we received from our dedicated volunteer monitors. It is only through their efforts that it was possible to complete the Kokosing State Scenic River SQM samples during 2008. Working together has produced significant results but additional volunteers are needed to monitor at all reference sites to ensure accurate and thorough data. For more information, please contact the Central Ohio SQM Coordinator at 614-265-6456.

Total Suspended Solids (TSS)

In 1999, the Scenic River Program added Total Suspended Solids (TSS) monitoring to the Ohio SQM Project. The purpose of this addition is to estimate the amount of soil sediments impacting a stream by estimating the turbidity of the water. These sediments are attributed to problems originating upstream of the sampling site. The equipment is calibrated to predict TSS at 90% accuracy. The measurements are accurate enough to determine the changes in sediment rates in a stream at a given location and time.

Variables such as amount of precipitation, slope and gradient of the river system, soil type, time of year data is collected, amount of development, amount of riparian corridor, velocity of the river flow, and the amount of waste water effluent have an effect on the TSS value.

The amount of precipitation is important because of the increased potential for sediments to be carried into the river during a rain event. The TSS value may appear higher than normal if precipitation amounts are not taken into account. Since large rain events usually happen in the spring and early summer, the time of year the samples are taken could affect the TSS score. The gradient of the stream is important as well. Sediments do not settle out as easily in high gradient streams because the velocity of the water washes it downstream. In low gradient streams, sediment has a chance to settle out, resulting in a lower TSS value. Soil types impact TSS values because some soil types erode faster than others. A better understanding of the types of soils within the watershed may give way to a better understanding of the baseline TSS values for a stream.

Development in an area can cause changes in the TSS score. Areas cleared for new buildings are often not re-planted, causing an acute rise in the amount of suspended solids in nearby streams. Impermeable surfaces can also cause chronic elevation of TSS values because there is no buffer to absorb or trap runoff. Wastewater treatment plant effluent can affect TSS scores in low flow situations if the plant employs only primary or secondary treatment.

The actual process of taking a sample is simple. Using a clear Lucite sediment stick developed by the Lake Soil and Water Conservation District, a water sample is collected from the stream. Keeping the sample materials suspended, water is then poured out of the tube until the 0.4-inch target dot is visible on the tube bottom. A reading of the water column height is taken from the markings on the stick to the nearest ¼ inch. A conversion table is then used to convert the sediment stick reading to a total suspended solid measurement in the form of an estimate of the weight of solids suspended in the water column (mg/L).

The TSS measurement can further be used to estimate water quality through the use of the following scale:

- TSS <10 mg/L = excellent water quality
- TSS 10-28 mg/L = normal water quality
- TSS 29-133 mg/L = impaired stream
- TSS >133 mg/L = severely impacted stream

2008 Results: A total of 27 TSS readings were taken in the Kokosing River. The Kokosing had median of <6.2 mg/L of TSS, corresponding to the maximum stream rating possible for this instrument. The data set ranged from <6.2 to 12 mg/L of total suspended solids. A total of 9 TSS readings were taken on the North Branch of the Kokosing with a median of <6.2 mg/L. This value also corresponds with the excellent range. The data set ranged from <6.2 to 16 mg/L.

Comparisons of Collected Stream Quality Monitoring Data

Monitoring of the same reference station is performed a minimum of three times per year consistently year after year. An assessment of the diversity and tolerance levels of taxonomy collected generates the Cumulative Index Value (CIV) for the site on a given date. Field assessment results are used as basic indicators of long-term changes in a stream's macroinvertebrate community and help Scenic Rivers staff identify pronounced stream quality problems.

Table 1 identifies the 20 macroinvertebrates assessed and their general tolerance to pollutants. Pollution-intolerant organisms, such as those listed in Group I, require unpolluted, high quality water in order to survive. Pollution-tolerant organisms, such as those listed in Group III, are extremely tolerant of deteriorated water conditions.

Table 1. Macroinvertebrate Pollution Tolerance

Group I Taxa Pollution Intolerant	Group II Taxa Moderately Tolerant	Group III Taxa Pollution Tolerant
Water Penny Beetle Larvae (WP) Mayfly Nymphs (MF) Stonefly Nymphs (ST) Dobsonfly Larvae (DO) Caddisfly Larvae (CD) Riffle Beetle Adult (RI) Other Snails (OS)	Damselfly Nymphs (DA) Dragonfly Nymphs (DR) Crane Fly Larvae (CR) Beetle Larvae (BL) Crayfish (CF) Scuds (SC) Clams (CL) Aquatic Sowbugs (SW)	Black Fly Larvae (BF) Aquatic Worms (AW) Midge Larvae (MI) Pouch Snails (PS) Leeches (LE)

Tables 2 and 3 represent the mean CIV for each SQM reference station sampled on the river during 2008. In addition, the table uses symbols (◆) to indicate those macroinvertebrates found to be present at least once during the year at the respective reference station. Each macroinvertebrate is identified by a 2-letter code given in Table 1 (above). A CIV of 23 or greater indicates *Excellent* stream quality; a CIV of 17-22 indicates *Good* stream quality; a CIV of 11-16 suggests *Fair* stream quality; and a CIV of 10 or less reflects *Poor* stream quality. Situated beside the CIV are the symbols + (improved), = (equal), or – (lower) indicating the relationship to the previous years CIV.

For the full range of CIVs attained at all sites monitored during the year including non-reference stations, please see the *Appendix*.

Table 2. Kokosing River 2008 Mean CIVs by Reference Station

STATION	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	S L	S W	B F	A W	M I	P S	L E	CIV
2.5		◆	◆	◆	◆	◆	◆				◆	◆	◆	◆		◆	◆	◆	◆	◆	21+
8.8	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆		◆		◆	◆		22+
11.6	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆		◆	◆		◆		26+
16.1	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆			26-
21.3	◆	◆		◆	◆	◆	◆	◆	◆	◆		◆	◆	◆			◆	◆			25+
23.2	◆	◆	◆		◆	◆	◆			◆		◆	◆	◆			◆	◆			25+
28.0	◆			◆	◆	◆	◆			◆	◆	◆	◆	◆		◆	◆	◆		◆	22-
32.7	◆	◆	◆	◆	◆	◆	◆			◆	◆	◆		◆			◆	◆	◆		21+
40.5	◆	◆	◆		◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆		◆	31+

Table 3. Kokosing River - North Branch 2008 Mean CIVs by Reference Station

STATION	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	S L	S W	B F	A W	M I	P S	L E	CIV
2.1	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆	26=
3.7	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆	◆		◆		◆	◆			◆	26-
6.3	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆		◆	◆			◆	25+

Figures 1.1 and 2.1 represents the maximum and minimum range of CIVs recorded during the year for each reference station. Figures 1.2, 2.2 represents the mean CIV at each reference station over several years.

Figure 1.1. 2008 Kokosing River CIV Maximum and Minimum Ranges

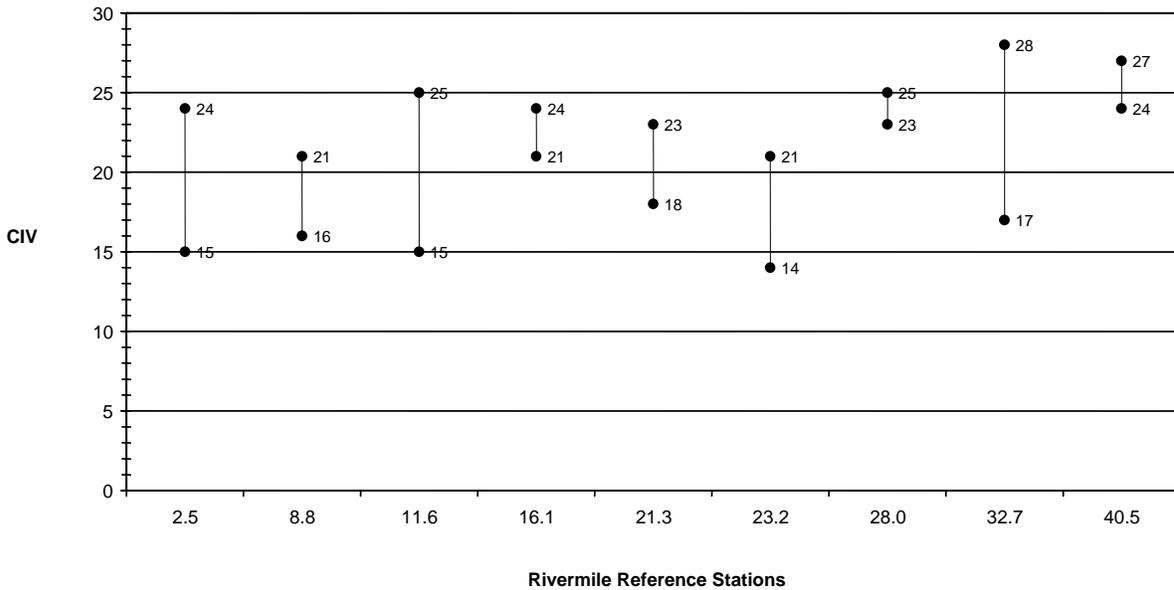


Figure 1.2. Kokosing River Mean CIVs: 1999- 2008

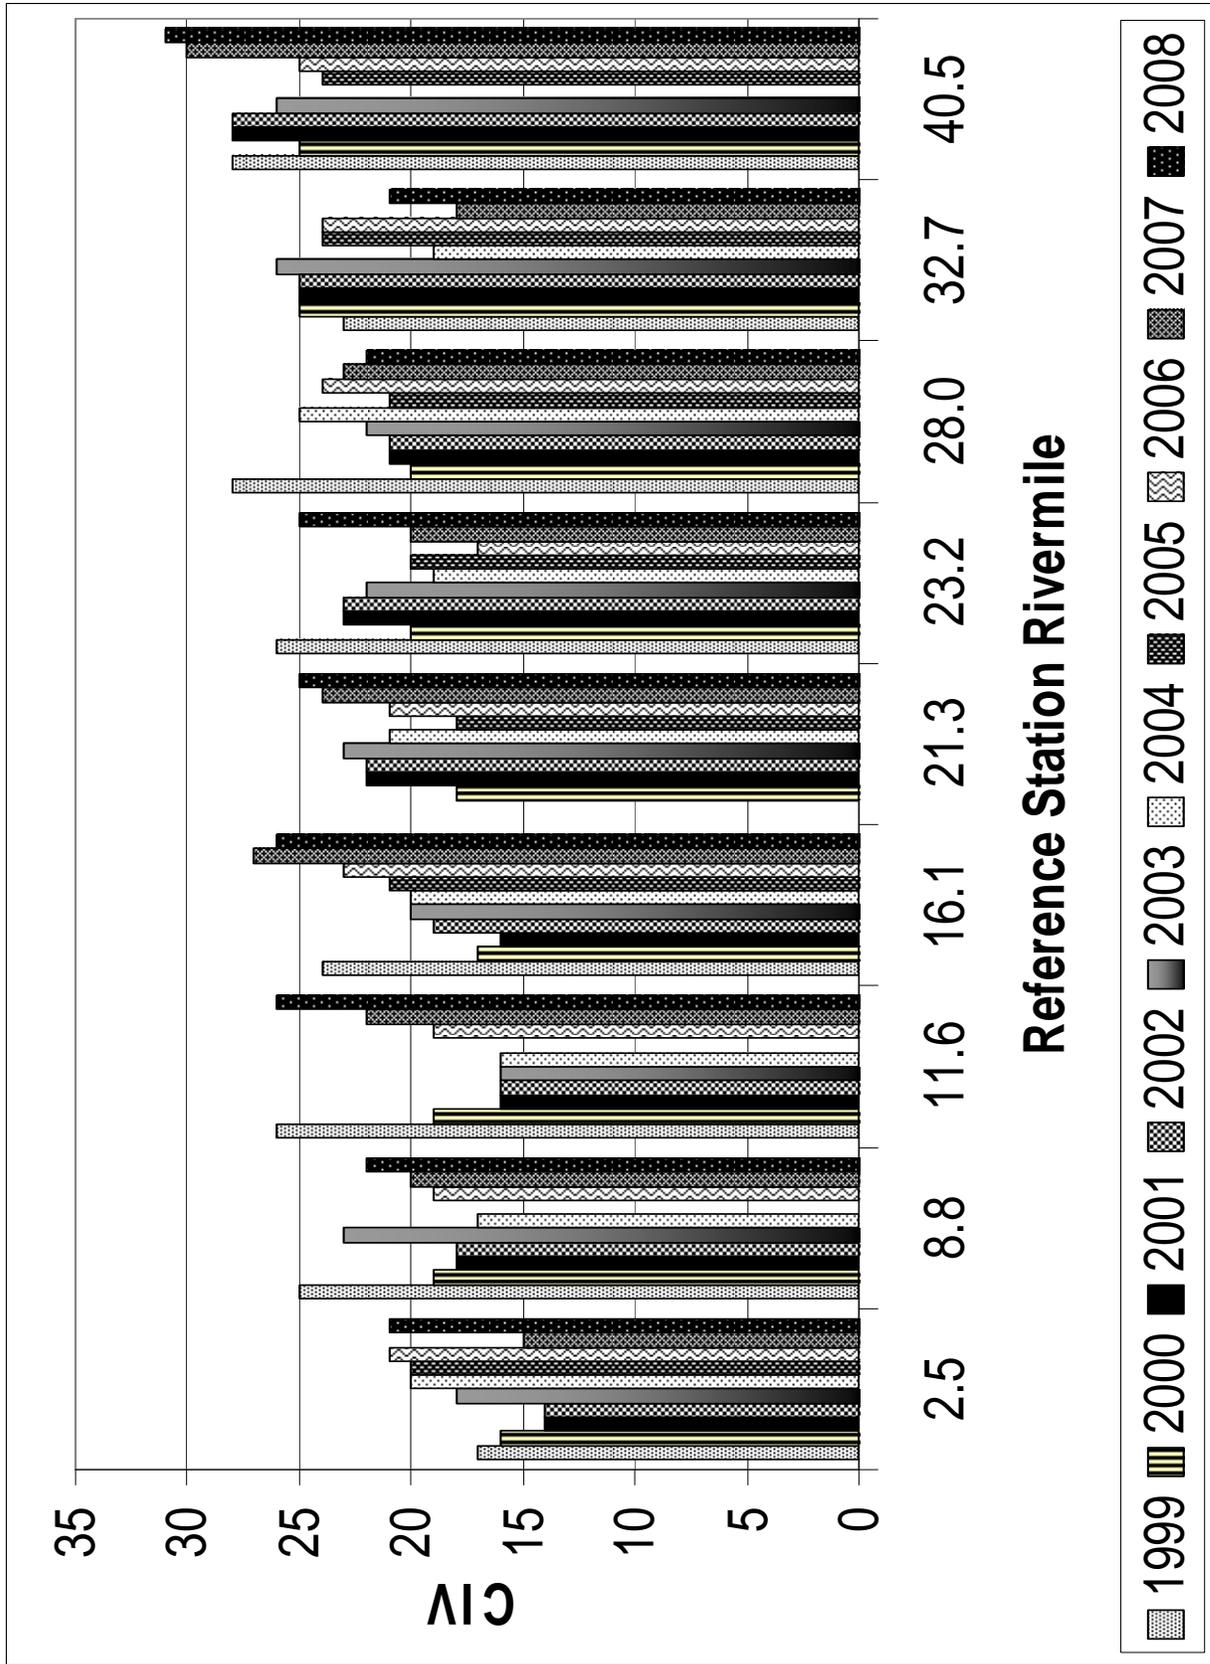


Figure 2.1. 2008 Kokosing River - North Branch CIV Maximum and Minimum Ranges


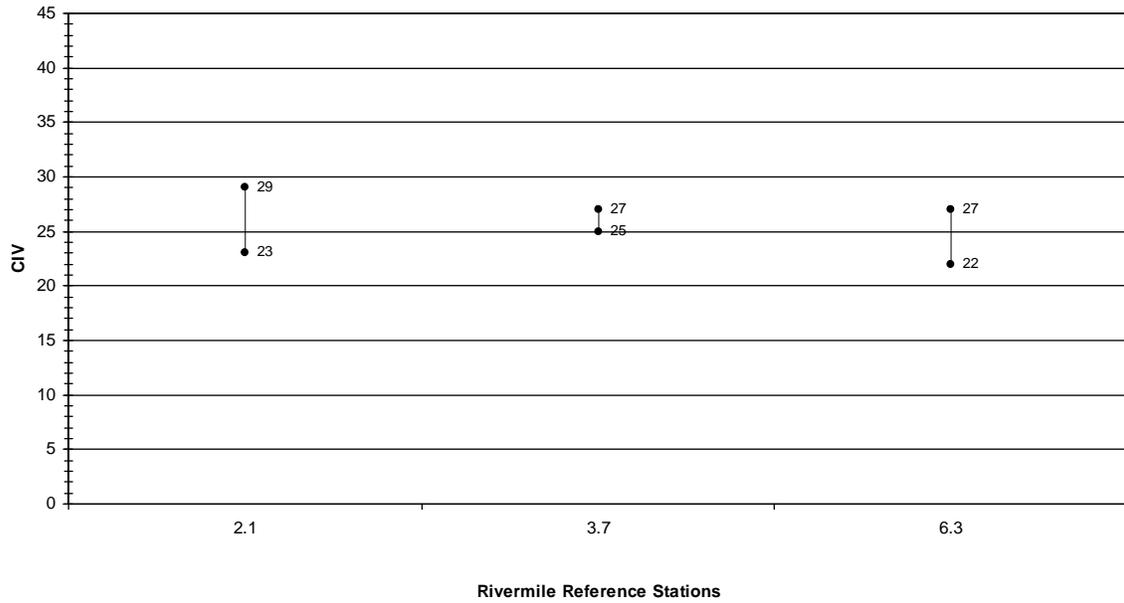


Figure 2.2. Kokosing River - North Branch Mean CIVs: 1999-2008

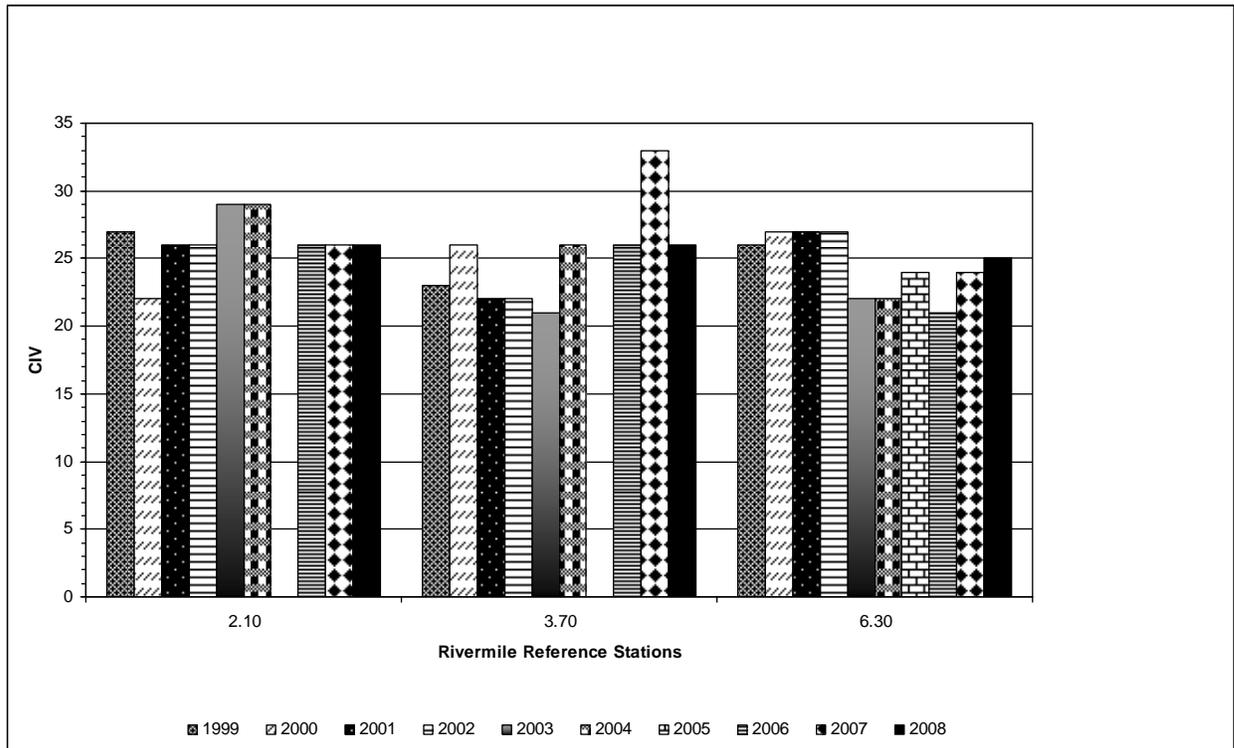

Qualitative Habitat Evaluation Index (QHEI)

The Qualitative Habitat Evaluation Index (QHEI) is a system developed and employed by the Ohio Environmental Protection Agency (OEPA) to measure physical habitat conditions in and around rivers and streams in Ohio. During 2008, SQM staff tested the QHEI to gather measurements at reference stations on several of Ohio's scenic rivers. It is anticipated that such measurements will become yet another annual tool that will be used to monitor habitat and water quality conditions on all Ohio scenic rivers.

Habitat conditions are re-evaluated every five years. SQM staff and volunteers are scheduled to perform evaluations next in 2013. Until then, results from the 2008 Citizen's QHEI are included below. When attempting to interpret this data, it is important to recognize that OEPA generally concludes that any site receiving a QHEI value greater than 60 meets current warmwater habitat (WWH) standards. Meeting WWH standards suggests that such locations should be adequate for supporting reproducing communities of fish and macroinvertebrate life. Sites attaining QHEI scores of greater than 80 are generally believed to contain exceptional habitat conditions for warmwater communities.

Tables 4 and 5 have been prepared to assist with determining the relationship between habitat conditions (measured by the QHEI) and macroinvertebrate community performance (measured by the Cumulative Index Value), at each of the reference stations on selected rivers.

Table 4. 2008 Kokosing River QHEI and SQM Assessment Data

Reference Station	QHEI	Attainment Status	2008 Average CIV	SQM Assessment
RM 2.5	78	FULL	21	GOOD
RM 8.8	90	FULL	22	GOOD
RM 11.6	76	FULL	26	EXCELLENT
RM 16.1	86.5	FULL	26	EXCELLENT
RM 21.3	83.5	FULL	25	EXCELLENT
RM 23.2	87.5	FULL	24	EXCELLENT
RM 28.0	80.5	FULL	23	EXCELLENT
RM 32.6	69	FULL	21	GOOD
RM 40.5	66	FULL	31	EXCELLENT

Table 5. 2008 Kokosing River- North Branch QHEI and SQM Assessment Data

Reference Station	QHEI	Attainment Status	2008 Average CIV	SQM Assessment
RM 2.1	87	FULL	26	EXCELLENT
RM 3.8	74.5	FULL	26	EXCELLENT
RM 6.3	84.5	FULL	25	EXCELLENT

*No data available

Appendix

Stream Quality Monitoring Data by Monitoring Station

2008 CIVs by Monitoring Station																						
KOKOSING RIVER																						
STATION	DATE	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	C L	S W	B F	A W	M I	P S	L E	CIV
2.50	6/23/2008		B	A	A	B	A						A				B		C			19.00
2.50	8/8/2008		C	A		C		A						A	A			B	B	A	A	20.00
2.50	8/20/2008		C		B	B	A	A				A	A		A			A	B			23.00
2.50	10/19/2008		B		A	C	A	B				A	A		B			A	B			23.00
8.80	6/21/2008	A	A			B	A	A					A	A	A		A		B			23.00
8.80	8/10/2008		B	A		B	A	A					A				B					18.00
8.80	10/11/2008	A	B		A	C		B	A	A			A	A	A					A		26.00
11.60	7/11/2008	A	B	B		B	A				A			B	A					A		22.00
11.60	8/26/2008	A	B	A		B	B	A		A	B		A	B	A		A	A				30.00
11.60	10/23/2008		C		A	C	A	A	A		A			B	B		A	A				25.00
16.10	7/15/2008	A	B	A		C	B	C				B	A		B		B	A				26.00
16.10	7/18/2008	B	B	A		B	B	C	A	A		B	A	B	B			A	A			32.00
16.10	8/18/2008	B	B			C	B	C				A			B		B	A				21.00
16.10	10/26/2008	A	C			C	A	C			B			B	B			A	A			23.00
21.30	6/25/2008	B	B			B	A	C		A			A	A	A			A	A			25.00
21.30	8/3/2008	A	B			B	A	C			A			A	A			A	A			23.00
21.30	8/15/2008	B	C		C	B	C					B		B	B			A	B			23.00
21.30	9/11/2008	A	C			B	A	C		A	A		A		A			B	A			25.00
21.30	9/20/2008	B	B			C	A	C	A	A		A	A	A	B			B	A			29.00
23.20	7/11/2008		B	A		B	A	A			A			B	A			A	A			23.00
23.20	8/26/2008	B	B	A		B	A	A			B		A	B	A							26.00
23.20	10/23/2008		C	A		C	A	B			A		A	A	A				A			24.00
23.30	5/28/2008	A	B	A		A	A	A		A	A			A				A	B			26.00
28.00	8/2/2008	A	B			C	A	B				B	A		A			A	B			23.00
28.00	8/30/2008	A	B			B	B				A		A		A		B	A	C		A	22.00
28.00	11/1/2008	A	B			B	A	A				B	A		A		B					22.00
32.60	4/21/2008	B	B				A	A			B	A	A					A				19.00
32.60	5/29/2008	B	A	A		B	A	B				A	A					A				23.00
32.60	7/7/2008	B	A		A		A	B					A		A			A	A	A		22.00
32.60	8/29/2008	B	B			B	A	B					A		A			C	C			21.00
40.50	6/1/2008	B	B	C		B	C	C	A	A	B	C	B		C		B	A	A		A	34.00
40.50	7/19/2008	B	B			C	C	B		A	C	B	B		C		B	A	B			28.00
40.50	10/26/2008	B	C			C	B	A	A	A	B	B	A		B		A	A	B			30.00

**2008 CIVs by Monitoring Station
KOKOSING RIVER - NORTH BRANCH**

STATION	DATE	W P	M F	S T	D O	C D	R I	O S	D A	D R	C R	B L	C F	S C	C L	S W	B F	A W	M I	P S	L E	CIV
2.10	7/6/2008	B		A	A	B	B	B			A	A					A					23.00
2.10	7/11/2008	B	B	A		B	B	B				B	A		B				A			25.00
2.10	8/5/2008	A	A	B	A	A	A	A			A		A	A	A							29.00
2.10	9/5/2008	B	B	B		A	A	A			A		A	A	A		A		A			28.00
2.10	9/10/2008	B	B	A	A	B	B	A		A		B			A		B		B			29.00
2.10	10/11/2008	B	B	B	A	A		A	A						A	A			A	B		23.00
3.70	6/29/2008	B	A		A	B	B	C			B	A			B		A	C			A	27.00
3.70	8/24/2008	B	B	A		C	B	B	A		A	B					A	C				25.00
3.70	10/25/2008	B	B	B		B	A	B			A	B	A		B			A				27.00
6.30	4/21/2008	B	B	A		B	A		A		B	A	A		A		A	A				27.00
6.30	5/29/2008	A	A	A		C	A		A				A		B			A				22.00
6.30	7/7/2008	B	B		A	C	B	A		A	B		A		A			A				27.00
6.30	8/29/2008	A		A		C	A	A	A				A		A		C	A			A	24.00